


# Europa Photosix Printer

Print to fit with Photosix - 6" wide (15cm) silver halide prints



- Accepts 3.5" to 6" paper widths
- Crisp 380 ppi resolution
- 8,000 prints per hour
- Thermal Backprinter, 68 character
- LED/LCD technology
- PdfDF 4.2 enabled

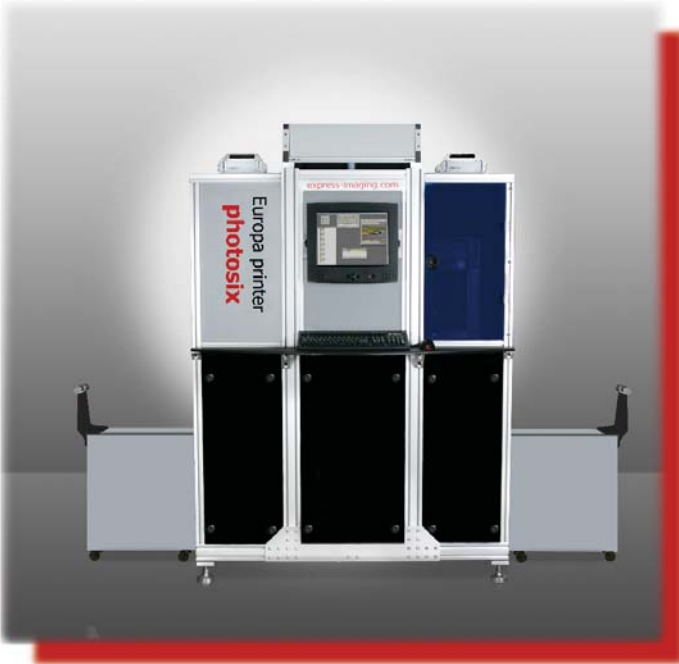

In partnership with



Next generation solutions to energize your business.

## Europa Photosix High Speed Digital RA4 Printer Specification

Image Format (Input)	JPEG, TIFF, BMP. Other print formats are also supported from industry standard devices outputting in L*a*b color space
Image Sources	PfDF server, BMC, image storage server, eGate XML workflow or other third party systems
Throughput Speed	8,000 prints per hour (excluding paper changes)
Output Options	3.5 in, or 7.6 cm roll-to-roll RA4 paper of any length 4 in, or 10.2 cm roll-to-roll RA4 paper of any length 4.5 in, or 11.4 cm roll-to-roll RA4 paper of any length 5 in, or 12.7 cm roll-to-roll RA4 paper of any length 6 in, or 15 cm roll-to-roll RA4 paper of any length  Multiple emulsions and paper thicknesses are supported
Output Lengths	Up to 9 in, or 22.9 cm
Print Channel Modes	Standard print sizes, Index prints, Postcards, Wallets, Panoramics, Borders and Custom Designs
Software Integration	PfDF 4.2 compatible for centralized workflow integration, XML workflow files (eGate) or hot folder input
Backprinter	68 character roll-to-roll thermal backprinter supporting 1 km and 2 km roll lengths. 2 lines, 34 characters/line
Color Management	Gretag MacBeth Eye-One™ sensitometer integrated into the system for creating color profiles
Resolution	380 ppi on 3.5 inch, 4 inch, 5 inch and 6 inch widths
Exposure Technology	2,376 LED array backlighting a high-quality LCD with a 50,000 hour lamphouse life, direct to paper exposure (no position shifting)
Paper Supply Cassettes	Modification for standard Agfa cassettes available
Order Control	IPSEC binary codes via punch marks for order control. Backprint barcode. PfDF datablocks for order/product assignment
Network Interface	Gigabit Ethernet

### Hardware Specifications

Power Supply	230 ± 10% 50/60Hz, 1.5k VA peak
Dimensions	104.6 in x 43.4 in x 74.8 in (l x w x h) 266 cm x 110 cm x 190 cm (l x w x h)
Weight	705 lbs, or 320 kg
Environmental	63° to 76° F room temperature (+17° to 25° C)

For more information visit online [www.express-imaging.com](http://www.express-imaging.com)

Keith Miller, Express Imaging Systems, sales@express-imaging.com, or call 206-720-1798 ext 115

European Inquires: Derek Fieldhouse, The PhotoIntel Group, sales@photointelgroup.com, or call 44 116 2325169